


## Technical Information

### REPRESENTATION OF THE ASTM C 1048-2004 STANDARD

This specification covers requirements for flat heat-strengthened and flat fully tempered coated and uncoated used in general building construction. The following drawing depicts that specification.

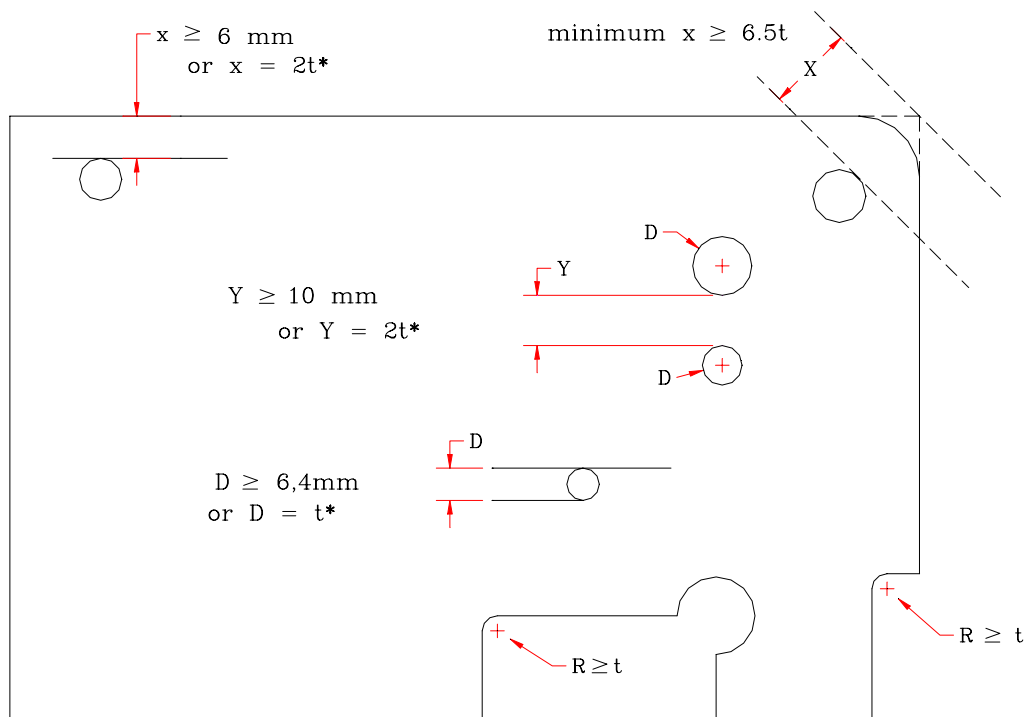

t - glass thickness  
 D - Diameter of holes  
 \* - highest of both values

R - Radius of corner or notches  
 Notches and cutouts must have fillets

The information contained in this bulletin is offered for assistance in the application of Prelco Inc. flat glass products, but IT DOES NOT CONSTITUTE A WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. Actual performance may vary in particular applications.

#### Reference :

ASTM - C1048-2004 Standard Specification for Heat-Treated Flat Glass--Kind HS, Kind FT Coated and Uncoated Glass